



AFTER MANHOLE IS ADJUSTED, AND ASPHALT CONCRETE HAS BEEN BROUGHT TO GRADE, CONTRACTOR SHALL PERFORM A "HEAT-WELD" IN ACCORDANCE WITH COLS SUPPLEMENTAL SPECIFICATION 1541 TO ENSURE A UNIFORM AND FLUSH TRANSITION.

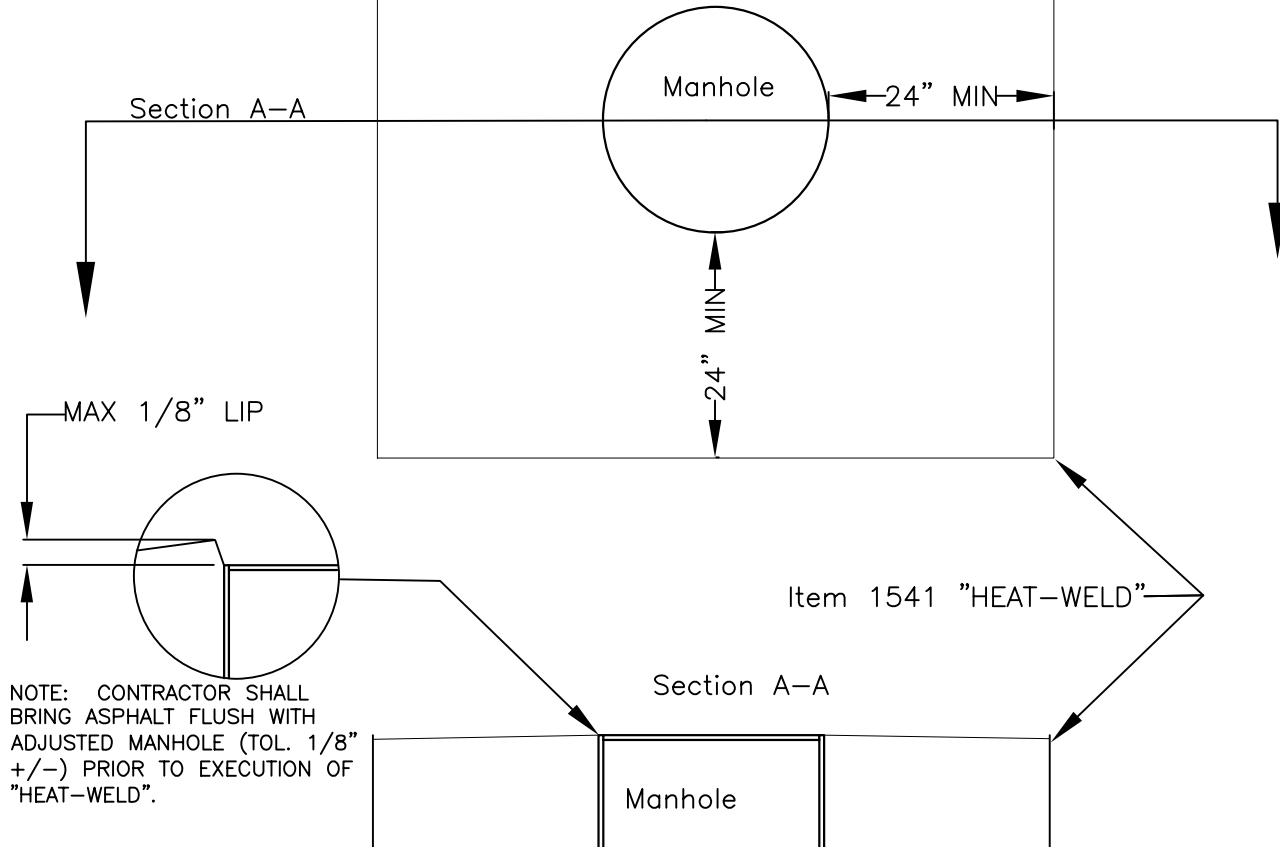

NOTE: CONTRACTOR SHALL BRING ASPHALT FLUSH WITH ADJUSTED MANHOLE (TOL. 1/8" +/-) PRIOR TO EXECUTION OF "HEAT-WELD".

NOTE: IF LID DOES NOT FIT FLUSH (1/8" +/- TOLERANCE), CONTRACTOR SHALL REPLACE CASTING AND/OR LID TO PROVIDE FLUSH FIT (1/16" +/-). REPLACEMENT SHALL FIT SPECIFICATIONS AND PERFORMANCE OF EXISTING STRUCTURE. IF SUITABLE REPLACEMENT DOES NOT EXIST, BOTH CASTING AND LID MUST BE REPLACED.

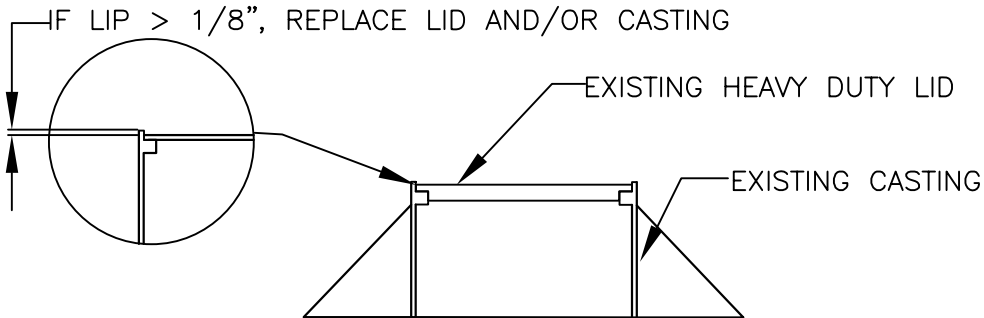

APPROVED

CITY ENGINEER DATE

NOT TO SCALE

MANHOLE ADJUSTED TO GRADE

CITY OF HILLIARD, OHIO  
STANDARD CONSTRUCTION DRAWING

1/1

MHA-1